


Elevate Base8 SM OS2 and MM OM4 MPO Trunk

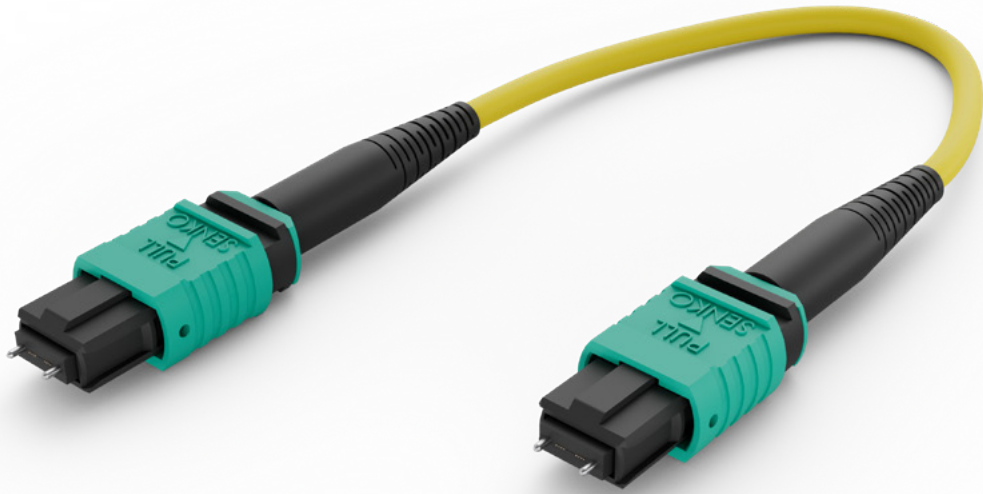

Product Overview

The Elevate range of MPO to MPO trunk cable assemblies form part of the wider MPO cassette and patching solution. As standard each cable is assembled using Senko low loss MPO Plus connectors and B2ca Euroclass multifibre cable which for singlemode is A2 specification and for multimode bend insensitive.

Elevate trunk cables are unpinned female to female as standard and wired to polarity B, in multi sub unit cables the standard breakout cable length from the connector side of the manifold to the connector face is 600mm. Male connectivity and alternative wiring and breakout lengths are available please request these when specifying your enquiry.

Cables detailed within this data sheet are OM4 multimode, and OS2 singlemode, other fibres including OM5 are available on request.

- ✓ Senko low loss MPO Plus
- ✓ Sustainable packaging solutions – including returnable reels
- ✓ Available as 8f though to 96f assemblies
- ✓ B2ca Euroclass cable as standard
- ✓ Compatible with the Elevate HD and MD cassette solution
- ✓ Access test data at anytime via on line test trace

Available Options



Singlemode (male/female)



Multimode (male/female)

Product Specifications

Feature	Values	
Number of fibres	8 to 96	
Fibre type	OS2 G657.A2 / OM4	
	Singlemode	Multimode
Connector A	MPO	
	APC	PC
Connector A colour	Green	Violet
Connector A quantity	1 to 12	
Keyway direction	UP	
Connector B	MPO	
	APC	PC
Connector B colour	Green	Violet
Keyway direction	UP	
Connector B quantity	1 to 12	
Cable jacket colour	Yellow	Violet
Cable diameter	3mm (8f) 3.5mm(16f 24f) 9.5mm (96f) 11.2mm (48f)	
Fibres per subunit	8 to 24	
Number of sub units	1 to 16	
Length of sub unit breakout	600mm	
Configured to polarity	B	
Gender of MPO	Female	
Durability	500 matings per TIA-568.3	
	Singlemode	Multimode
Typical Insertion loss	0.15dB	0.15dB
Maximum Insertion loss	0.25dB	0.25dB
Typical return loss	>55dB	>25dB
Operating temperature	-40 to +75	


Product Features Explained



All Elevate MPO solutions are built on Senko low loss, best in class connectivity.



Each MPO Cable is factory tested. Test data is accessed via the QR code attached to the cable which links to our test trace portal.

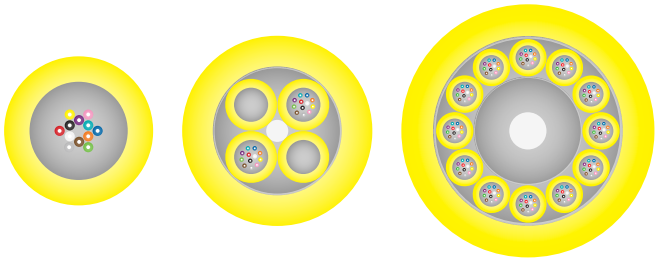

Cable cross section

Produced using 8f sub units in a compact diameter design.




Fibre configuration

Terminated with Senko MPO Plus low loss 12F connectors, female (unpinned) as standard male (pinned) available on request, the centre four fibre positions within each connector are not used in a Base8 cable.


Polarity

Assembled to Polarity B as standard. Alternative polarity available on request

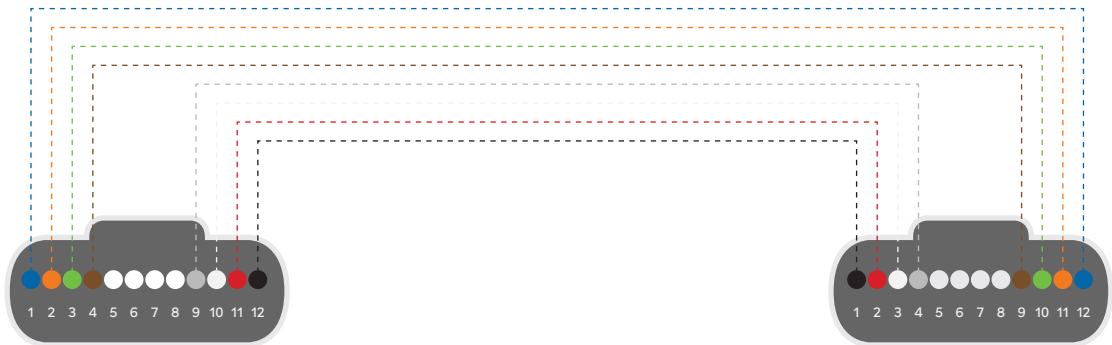

Product Drawing

Base 8

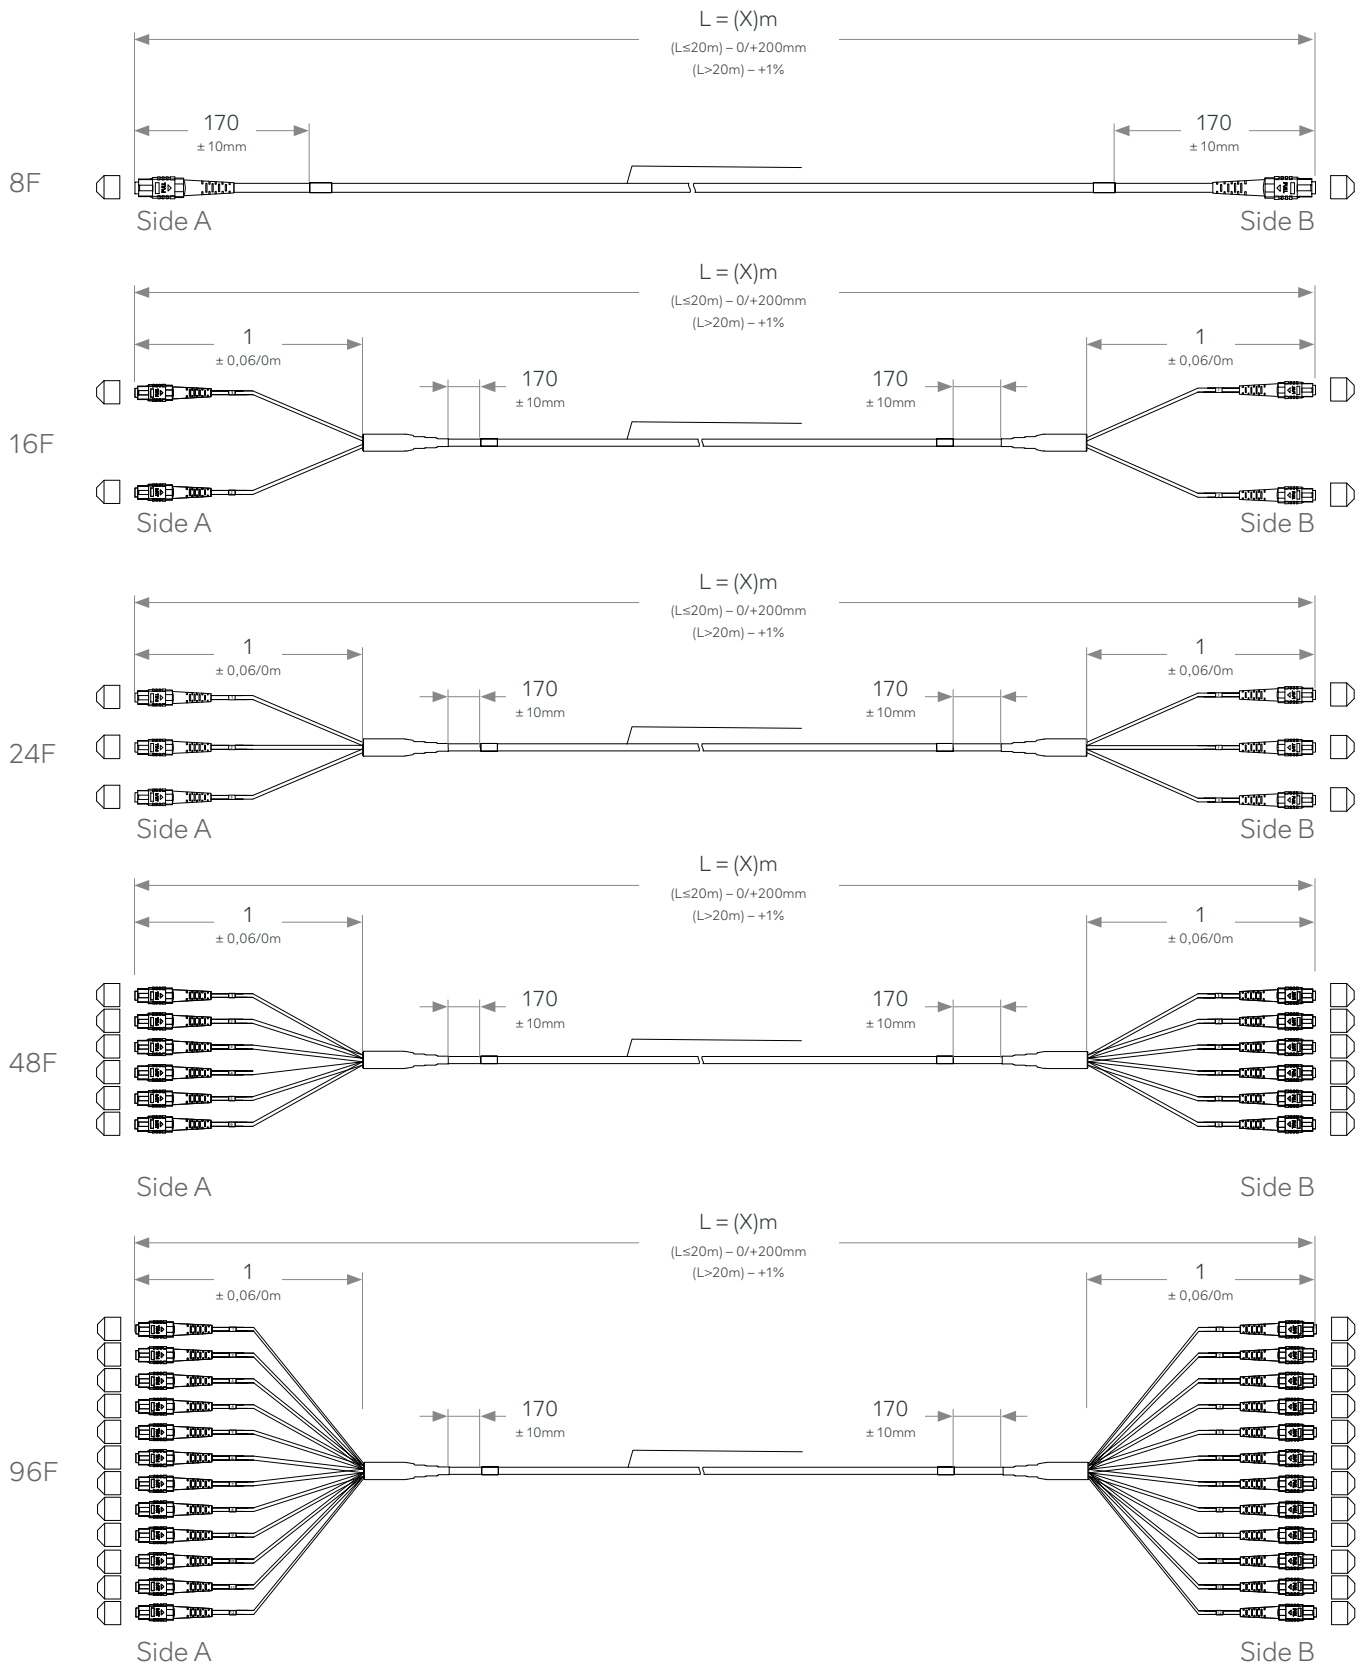

Product Standards

Applicable standard

Compliance with International Standards ISO 11801, EN 50173 and ANSI/TIA 568-E, necessitates that this product/component adheres to all relevant normative references specified within these standards.



Product Packaging

Packaging Method	Specification
Outer carton	FSC certified plain brown cardboard cartons
Compostable bags	TUV Certified Compostable bags
Cable reels	Recycled plastic returnable cable reel
	3mm & 3.5mm diameter <100mtrs - Certified compostable bags
	3mm & 3.5mm diameter >100mtrs - Recycled plastic returnable cable reels
	9.5mm & 11.2mm diameter (all lengths) - Recycled plastic returnable cable reels

Part Number Table

Base Type			Fibre Type		Fibre Count		Connector A		Connector B		Method		Length (m)	
208	-	08	-	OM4	-	8	-	MPOM	-	MPOM	-	A	-	XXX
				OS2		16		MPOF		MPOF		B		
						24						C		
						48								
						96								